


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G02B 6/293	A1	(11) International Publication Number: WO 00/11510 (43) International Publication Date: 2 March 2000 (02.03.00)
<p>(21) International Application Number: PCT/US99/16215</p> <p>(22) International Filing Date: 16 July 1999 (16.07.99)</p> <p>(30) Priority Data: 60/097,464 21 August 1998 (21.08.98) US</p> <p>(71) Applicant (for all designated States except US): CORNING INCORPORATED [US/US]; 1 Riverfront Plaza, Corning, NY 14831 (US).</p> <p>(72) Inventor; and</p> <p>(75) Inventor/Applicant (for US only): KROL, Mark, F. [US/US]; 12 Michaels Way, Painted Post, NY 14870 (US).</p> <p>(74) Agent: GREENER, William; Patent Department, SP TI 3-1, Corning Incorporated, Corning, NY 14831 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published With international search report.</p>

(54) Title: TUNABLE PERIODIC FILTER

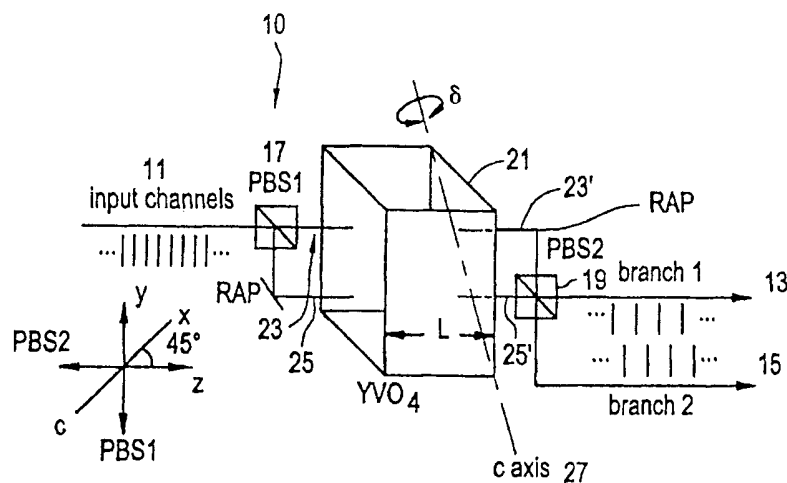

(57) Abstract

A polarization-interferometry based tunable periodic filter includes polarization defining components such as polarizing beam splitters or polarizing beam displacers located on the input and output sides of a phase retarder such as a birefringent crystal. A polarization independent input consisting of multiple optical channels having a periodic frequency spacing is converted to a branched output of optical channels in which each branch has a periodic frequency spacing that is different from that of the input, and which are interleaved with each other. The output period is tunable by adjusting the phase delay of orthogonal polarization components. A contrast ratio of ≥ 20 dB can be realized. The device allows the mux/demux of up to 200 WDM channels with a 50 GHz frequency spacing. Applications of the device include a band splitter, a wavelength selective cross-connect, and a wavelength monitor.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

TUNABLE PERIODIC FILTER

Background of the Invention

Field of the Invention

5 The invention generally relates to a device and method for routing (e.g., dividing and subdividing) bands of optical signals and, more particularly, to a multi-port, tunable periodic filter based on polarization interferometry, and a method for tuning the transmission peaks and frequency spacing of the optical signals.

Description of Related Art

10 The demand for increased data transmission capability continues to grow. Users of DWDM systems are pressing for greater bandwidth utilization with 50 GHz and tighter channel spacing, adding further challenge to upgrade existing DWDM's struggling with 100 GHz channel spacing.

15 Several approaches for providing building blocks for all-optical networks capable of meeting the challenging demands of service providers and users involve tunable filters. These include (but are not limited to), e.g., cascaded Fabry-Perot (resonant cavity) and Mach-Zehnder (interferometry) components for squeezing more and more channels into a free spectral range or limited bandwidth. Such devices and
20 examples of their utilization are described in Green, *Fiber Optic NETWORKS*, Prentice Hall, cha. 4, (1993). Disadvantages associated with these devices include, e.g., long response time or slow tuning speed, poor crosstalk performance and device complexity and fabrication tolerance. Other lattice and Mach-Zehnder component filter designs

used as band splitters are also described in EP 0 724 173A1, US 5,680,490 and OFC '98 Technical Digest, paper ThQ7 by Nolan *et al.* These devices lack optimum contrast ratio and desired tuning capability.

5 The inventors have therefore recognized a need for a DWDM filter device that caters to the immediate and future requirements for high speed network systems without the disadvantages associated with current components and approaches. Accordingly, the invention describes a periodic filter device that has the attributes of accurate and easy tuning, polarization independence, high contrast ratio over the whole 1.5 μm telecommunications band, environmental stability, conformity with the ITU
10 grid, and others, that will be apparent from the description, drawings and claims which follow. Applications of the invention include, but are not limited to, band splitters, wavelength monitors and wavelength selective cross-connect components.

Summary of the Invention

15 Accordingly, the invention is broadly directed to a device for routing optical signals. Additional features and advantages of the invention will be set forth in the description which follows, and in part will be apparent from the description, or may be learned by practice of the invention. The objectives and other advantages of the invention will be realized and attained by the apparatus and method particularly pointed
20 out in the written description and claims hereof as well as the appended drawings.

An embodiment of the invention is directed to a tunable optical channel routing device including an input for a plurality of optical channels having a frequency period; first means for separating a polarization state of the input optical channels into orthogonal (s and p) polarization states; means for temporally retarding one of the
25 orthogonal polarization states with respect to the other orthogonal polarization state for producing an ordinary beam and an extraordinary beam for each polarization state; second means for separating the polarization states of an output from the retarding means again into orthogonal (s and p) polarization states; and, an output for the plurality of optical channels from the second means wherein each channel of a first
30 group of output channels has a center frequency and the first group of output channels has a frequency period that is different from the frequency period of the input channels, and wherein each channel of a second group of output channels has a center frequency

and the second group of output channels has a frequency period different from the frequency period of the input channels and is interleaved with the first group. The device provides a contrast ratio ≥ 20 dB over the $1.5 \mu\text{m}$ spectral band, which is essentially limited by the dispersion of the retarding component (e.g., birefringent material).

5 In different aspects of this embodiment, the optical components for separating the orthogonal polarizations can be polarizing beam splitters (PBS's) or polarizing beam displacers (PBD's), and the components for providing the ordinary and extraordinary beams can be a birefringent crystal or a birefringent optical fiber. While
10 the period of the groups of output channels is tailored by the thickness or amount of birefringent material traversed by the light, fine tuning is achieved by rotating the birefringent crystal about its c-axis, changing the length of the birefringent fiber, or through the use of a phase compensator such as a liquid crystal. An optical path length compensator such as, e.g., a half-wave plate or a selective index transparent material is
15 used as necessary to maintain equal optical path lengths to minimize polarization mode dispersion (PMD).

1x2 and cascaded 2x2 devices according to embodiments of the invention provide further application flexibility as, e.g., optical cross-connect components.

20 It is to be understood that both the foregoing general description and the following detailed description are exemplary and are intended to provide further explanation of the invention as claimed.

The accompanying drawings are included to provide a further understanding of the invention and are incorporated in and constitute a part of this specification, illustrate
25 embodiments of the invention and together with the description serve to explain the principles of the invention.

Description of the Drawings

Figure 1 schematically shows an embodiment of a polarization independent, three-port, tunable periodic filter according to an embodiment of the invention in which polarization means for separating light input into orthogonal polarization states includes two polarizing beam splitters, and phase retardation means is a birefringent crystal that is rotatable about its c-axis;

Figure 2 schematically shows another embodiment of a polarization independent, three-port, tunable periodic filter according to the invention in which polarization means for separating light input into s and p polarization states includes two polarizing beam displacers, and further including an optical path length compensating half-wave plate;

Figure 3 schematically shows another embodiment of a polarization independent, three-port, tunable periodic filter according to the invention in which polarization means for separating input light into orthogonal polarization states includes two polarizing beam splitters, and phase compensation means are two birefringent fibers having polarization maintaining fiber pigtails; and

Figure 4 is a schematic illustration of the principle of polarization interferometry using a birefringent material.

Detailed Description of Preferred Embodiments of the Invention

Reference will now be made in detail to the present preferred embodiments of the invention, examples of which are illustrated in the accompanying drawings and tables presented herein.

The invention deals with the filtering of optical signals and, in particular, to the splitting and combining of bands or groups of optical channels, as in a WDM; thus although the embodiments described herein will discuss the demultiplexing aspects of the invention where a band of input channels with a known frequency period or spacing is divided into, e.g., two output channel groups each of the channels of which have a center frequency and a frequency spacing equal to twice that of the input, those skilled in the art will readily appreciate that the same considerations apply to the multiplexing aspects of the invention, and that these do not need to, and will not, be described in detail for an understanding of the invention.

The invention is based upon the well-known principles of polarization interferometry using birefringent materials. Although the invention is operated and described for use with reference to two polarization states (s and p), the optical phenomena is described below for a single polarization state, for clarity and ease of understanding. As shown in Fig. 4, a birefringent material 100 is placed in between two orthogonal polarizers P1 and P2. If the polarization of the input light is parallel to that of P1, the system has an optical transmission coefficient, T, described by the relation:

$$T = \frac{1}{2} [1 + \cos(\phi_0 + 2\pi\nu\tau)] , \quad (1)$$

where ν is the optical frequency, and τ is given by

$$\tau = \frac{L}{c} (n_{eg} - n_{og}) \equiv \frac{L}{c} (\Delta n_g) , \quad (2)$$

where L is the thickness of the birefringent crystal, c is the speed of light in free-space, and Δn_g is the difference in group refractive indices between ordinary and extraordinary beams at a certain center wavelength, e.g., 1550 nm). The frequency period of the sinusoidal transmission function is thus $(1/\tau)$, which can be precisely set by tailoring L.

5 The transmission peaks (i.e., center frequency of each output channel) can be fine-tuned to align them with the ITU frequency grid, through the phase constant ϕ_0 in eq.(1). In practice, this can be achieved by slightly rotating the birefringent crystal with respect to its c-axis as shown in Fig. 1. Rotating $\delta \sim 10$ mrad, for example, will slightly change L and fine tune the transmission peaks without significant beam walk-off.

10 Alternatively, a phase compensator such as, e.g., a liquid crystal, may be used after the first PBS 17 to dynamically control ϕ_0 and fine tune the peak positions.

In a preferred embodiment of the invention, with reference to Fig. 1, a polarization independent, optical signal multi-channel subdivider/combiner 10 based upon a three-port periodic tunable filter having an output whose frequency period is
15 equal to twice that of the input, includes a group of elliptically polarized (i.e., any polarization state) input signal channels 11 having a frequency period, $1/2\tau$, which are input to PBS 17. PBS 17 separates the input channels into orthogonal s and p polarizations 23, 25, transmitting one of them into birefringent crystal 21, and reflecting the other preferably from a right angle prism (not shown) or an equivalent

device that does not affect the polarization of the light, into crystal 21. Birefringent crystal 21 has a physical thickness, L , and is preferably a material that exhibits a large birefringence; e.g., YVO_4 ($\Delta n_g = 0.21101$). Other materials such as, e.g., calcite and rutile, are also suitable, however, as large a birefringence as possible is preferred. As shown, birefringent crystal 21 has a c-axis orientation at 45 degrees with respect to the axes of PBS's 17 and 19 (and thus with respect to the s and p polarization states). Each of the orthogonal polarizations 23, 25 traversing birefringent crystal 21 is decomposed into an ordinary beam and an extraordinary beam having a relative time delay, τ , resulting in an output that is elliptically polarized at PBS 19. PBS 19, similar to PBS 17, separates and transmits the orthogonally polarized light as a first output channel group 15, and reflects a second output channel group 13. Output channel groups 13, 15 each have a center frequency and a frequency period equal to $1/\tau$, the first group 13 being out of phase with the second group 15 by π .

In another aspect of this embodiment (not shown), two independently adjustable birefringent crystals can be used in place of sole birefringent crystal 21, to alleviate the parallelism requirement of the surfaces of a single crystal, which should be better than 0.1 mrad in order to maintain a constant phase for the two beams.

Low insertion loss devices of the type described above can be fabricated as micro-optic assemblies similar to polarization independent optical isolators which exhibit a typical insertion loss of about 0.6 dB. Before pigtailling, the devices can be further cascaded and integrated in one package to form $1 \times N$, e.g., 1×4 or 1×8 , channel subdividers. In this way the insertion loss can be kept low by reducing the amount of fiber pigtailling.

In an alternative embodiment according to the invention, as shown in Fig. 2, the polarizing beam splitters 17, 19 of FIG. 1 are replaced by polarizing beam displacers 37, 39, each having a thickness, d . The resulting smaller beam separation (~ 1.5 mm) in the YVO_4 crystal relaxes the parallelism requirement on the crystal faces. An additional advantage of the beam displacers is their typically higher extinction ratio over PBS's. As shown in Fig. 2, an elliptically polarized input channel group 11 is input to PBD 37 which separates the beam into mutually orthogonal s and p polarizations. These enter and propagate through birefringent crystal 41 wherein each is decomposed into an ordinary beam and an extraordinary beam, and emerge as

elliptically polarized light. This output then enters the second PBD 39 which separates the light signals passing through it, again into orthogonal polarizations represented by (15a, 15b) and 13, respectively. Beams 15a and 15b pass through half-wave plate 43 which rotates the polarization of each beam as a way to minimize or eliminate PMD.

5 Orthogonally polarized beams 15a and 15b then pass through PBD 45, having a thickness equal to $2d$, for recombination into output channel group 15. Output channel group 13 is deflected by polarization maintaining means 66. Similar to that described above, output channel groups 13, 15, each have a frequency spacing that is twice as large as that of input group 11. The channel center frequencies can be fine tuned by

10 positioning a phase retarder, such as a liquid crystal, after PBD 37. In an alternative aspect of this embodiment, the $\lambda/2$ plate could be replaced by a piece of material providing optical path length equalization (e.g., having a selective index of refraction and thickness to equalize the path lengths).

In another embodiment, illustrated in Fig. 3, a periodic group of input channels

15 11 propagate to a first PBS 17 that separates and transmits either s or p-polarized light 23, and which reflects p or s-polarized light 25. The output from PBS 17 is coupled into birefringent fibers (BRF's) 71a, 71b through polarization maintaining fiber pigtails 73, and is then coupled into second PBS 19 again through polarization maintaining fiber pigtails. Second PBS 19 separates and reflects a first group of output signals 13

20 and transmits a second group of output signals 15; each group having a frequency spacing equal to twice that of input group 11. Typically, a BRF length of 6m generates approximately a 10ps time delay, τ , (i.e., a 100 GHz frequency period). The filter can be fine-tuned by stretching the BRF to change L . Although the total insertion loss may be higher (i.e., due to pigtail to a micro-optic component), the fiber based device can

25 be easily assembled. Ideally an all fiber PBS would reduce excess insertion loss.

In all of the preceding embodiments, the devices are inherently polarization insensitive. When the extinction ratio of the PBS's or PBD's are in the range of 30-40 dB, the contrast ratio of the embodied devices is 20 dB or more.

It will be apparent to those skilled in the art that various modifications and

30 variations can be made in the apparatus and method of the present invention without departing from the spirit or scope of the invention. Thus, it is intended that the present

invention cover the modifications and variations of this invention provided they come within the scope of the appended claims and their equivalents.

We Claim:

1. A tunable optical channel routing device, comprising:
 - 5 an input for a plurality of optical channels having a frequency period;
first means for separating a polarization state of the input optical channels into orthogonal (s and p) polarization states;
means for temporally retarding one of the orthogonal polarization states with respect to the other orthogonal polarization state for producing an ordinary beam and an
10 extraordinary beam for each of the polarization states;
second means for separating the polarization states of an output from the retarding means into orthogonal (s and p) polarization states; and
an output for the plurality of optical channels from the second means wherein each channel of a first group of output channels has a center frequency and the first
15 group of output channels has a frequency period that is different from the frequency period of the input channels, and wherein each channel of a second group of output channels has a center frequency and the second group of output channels has a frequency period different from the frequency period of the input channels and is interleaved with the first group;
 - 20 further wherein the device has a contrast ratio ≥ 20 dB over a spectral band from about 1520 nm to 1570 nm.
2. The device of claim 1, wherein the first and second means for separating the polarization states each comprises at least one of a polarizing beam splitter and a
25 polarizing beam displacer and further wherein the means for temporally retarding one of the orthogonal polarizations with respect to the other orthogonal polarization comprises at least one of a birefringent crystal and a birefringent optical fiber.
3. The device of claim 2, further comprising means for fine-tuning the center
30 frequency of the output channels.

4. The device of claim 2, further comprising means for changing the length of the birefringent fiber for tuning the frequency period of the output channels.

5. The device of claim 1, further comprising an optical path length compensator positioned in a propagation path of at least one of the first group of output channels and the second group of output channels.

6. The device of claim 5, wherein the optical path length compensator is an achromatic half-wave plate.

10

7. The device of claim 5, wherein the optical path length compensator is a transparent material having an index of refraction and a physical thickness sufficient to adjust an optical path length difference between the first group of output channels and the second group of output channels.

15

8. The device of claim 1, wherein the input comprises multiple groups of input channels.

9. The device of claim 1, wherein the first and second groups of output channels each have a frequency spacing ≤ 200 GHz.

20

10. The device of claim 1, wherein the first and second groups of output channels each have a frequency spacing ≤ 100 GHz.

11. The device of claim 1, wherein the first and second groups of output channels each have a frequency spacing ≤ 50 GHz.

25

12. An optical channel routing device, comprising a concatenated plurality of devices according to claim 8, wherein at least one of a set of inputs and outputs of one device is connected to a respective one of a set of outputs and inputs of another device.

30

13. The device of claim 2, comprising two birefringent crystals such that each one of the orthogonal polarization components passes through a respective birefringent crystal.
- 5 14. The device of claim 2, wherein the birefringent crystal is one of YVO₄, calcite and rutile.
15. The device of claim 1, wherein the frequency period of the output channels is substantially constant over the wavelength range from about 1520 nm to 1570 nm.
- 10 16. The device of claim 2, wherein the means for retarding one of the orthogonal polarizations with respect to the other orthogonal polarization comprises a polarization maintaining fiber pigtailed to an end of the birefringent fiber.
- 15 17. A tunable optical channel routing device, comprising:
an input for a plurality of optical channels having a frequency period;
a first polarization beamsplitter in an optical path of the input channels for separating and transmitting an output comprising one of an orthogonal (s or p) polarization state of the input and for reflecting the other orthogonal (p or s)
20 polarization state of the input;
means for steering the reflected polarization state of the input without changing the polarization state;
a birefringent crystal in the first polarization beamsplitter output optical paths having a thickness L and a c-axis oriented at 45° with respect to the s and p polarization
25 states such that the crystal propagates an output comprising an ordinary beam and an extraordinary beam;
means for steering an output from the birefringent crystal without changing the polarization state;
a second polarization beamsplitter in the optical path of the output from the
30 birefringent crystal for separating and transmitting a first group of output channels comprising a portion of the orthogonal (s and p) polarization states of the output and for

reflecting a second group of output channels comprising another portion of the orthogonal (p and s) polarization states of the output;

wherein each channel of a first group of output channels has a center frequency and the first group of output channels has a frequency period that is different from the frequency period of the input channels, and wherein each channel of a second group of output channels has a center frequency and the second group of output channels has a frequency period different from the frequency period of the input channels and is interleaved with the first group;

further wherein the device has a contrast ratio ≥ 20 dB over a spectral band from about 1520 nm to 1570 nm.

18. The device of claim 17 wherein the crystal is rotatable about the c-axis for fine tuning the center frequency of the output channels.

19. The device of claim 17 further comprising a phase compensator located in an optical path after the first polarization beam splitter for fine tuning the center frequency of the output channels.

20. The device of claim 19 wherein the phase compensator is a liquid crystal.

20

21. The device of claim 17 wherein said device is a microoptic assembly.

22. A tunable optical channel routing device, comprising:
an input for a plurality of optical channels having a frequency period;
a first polarization beam displacer having a thickness, d, in an optical path of the input channels for separating and transmitting an output comprising orthogonal (s and p) polarization states of the input;

a birefringent crystal in the first polarization beam displacer output optical path having a thickness L and a c-axis oriented at 45° with respect to the s and p polarization states such that the crystal propagates an output comprising at least one of an ordinary beam and an extraordinary beam;

30

a second polarization beam displacer having a thickness, d , in the crystal output optical path for separating and transmitting an output comprising orthogonal (s and p) polarization states of the second polarization beam displacer output, one of which is a second group of output channels;

5 an optical path length compensator located in an optical path of one of the s and p polarization states output from the second polarization beam displacer;

a third polarization beam displacer having a thickness, $2d$, in the second polarization beam displacer output optical path of one of the s and p polarizations for combining and transmitting a first group of output channels,

10 wherein each channel of a first group of output channels has a center frequency and the first group of output channels has a frequency period that is different from the frequency period of the input channels, and wherein each channel of a second group of output channels has a center frequency and the second group of output channels has a frequency period different from the frequency period of the input channels and is
15 interleaved with the first group;

further wherein the device has a contrast ratio ≥ 20 dB over a spectral band from about 1520 nm to 1570 nm.

23. The device of claim 22 wherein the optical path length compensator is an
20 achromatic half-wave plate.

24. The device of claim 17 wherein the means for steering the reflected polarization states are right angle prisms.

25 25. A tunable optical channel routing device, comprising:
 an input for a plurality of optical channels having a frequency period;
 a first polarization beamsplitter in an optical path of the input channels for
separating and transmitting an output comprising one of an orthogonal (s or p)
polarization state of the input and for reflecting the other orthogonal (p or s)
30 polarization state of the input;

a first birefringent fiber coupled to the first polarization beamsplitter output for propagating a portion of the orthogonal (s and p) polarizations such that the fiber propagates an output comprising an ordinary beam and an extraordinary beam;

5 a second birefringent fiber coupled to the first polarization beamsplitter output for propagating another portion of the orthogonal (s and p) polarizations such that the fiber propagates an output comprising an ordinary beam and an extraordinary beam;

a second polarization beamsplitter coupled to both the first birefringent fiber output and the second birefringent fiber output for separating and transmitting a first group of output channels comprising orthogonal (s and p) polarization states of the
10 output and for reflecting a second group of output channels comprising orthogonal (s and p) polarization states of the output;

wherein each channel of a first group of output channels has a center frequency and the first group of output channels has a frequency period that is different from the frequency period of the input channels, and wherein each channel of a second group of
15 output channels has a center frequency and the second group of output channels has a frequency period different from the frequency period of the input channels and is interleaved with the first group;

further wherein the device has a contrast ratio ≥ 20 dB over a spectral band from about 1520 nm to 1570 nm.

20

26. The device of claim 25 wherein the first and second birefringent fibers are coupled to the first and second polarization beamsplitters by polarization maintaining fiber pigtails.

25

27. The device of claim 26 wherein the first and second birefringent fibers have polarization axes and the polarization maintaining fiber pigtails have polarization axes wherein the birefringent fiber axes are oriented at 45 degrees to the polarization maintaining fiber axes.

30

28. The device of claim 25 further comprising means for stretching at least one of the birefringent fibers for fine-tuning the center frequency of the output channels.

FIG.1

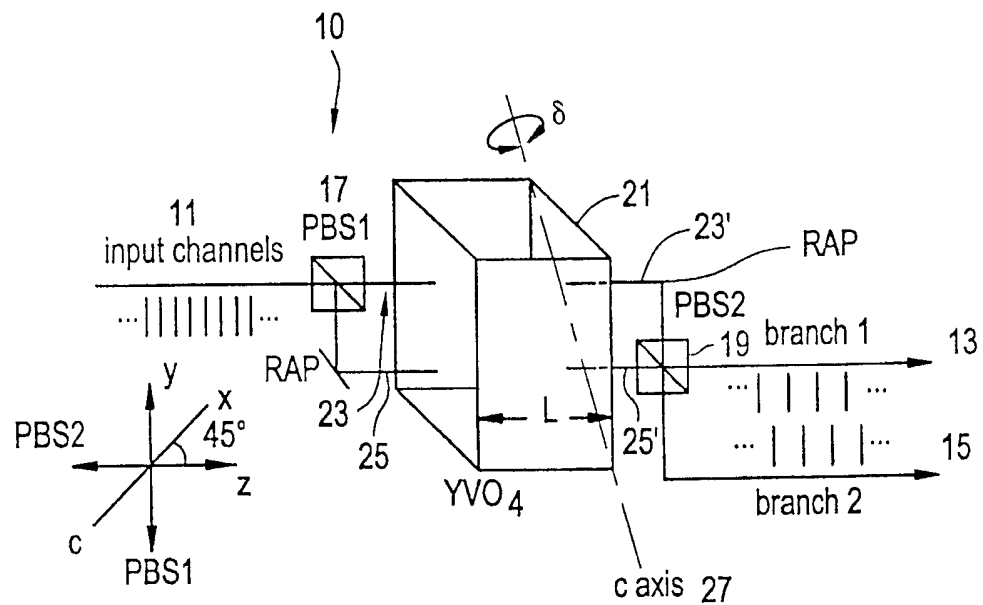


FIG.2

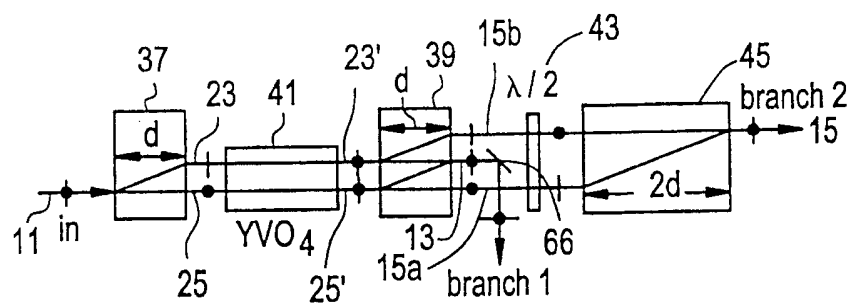


FIG.3


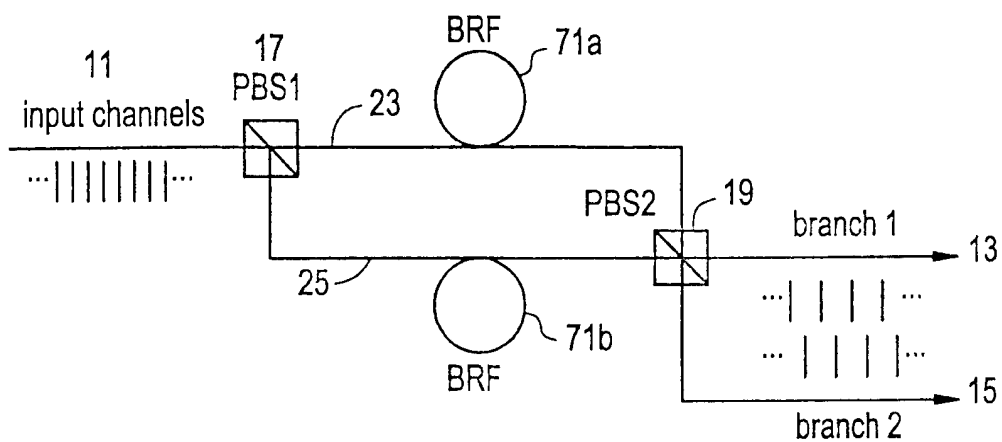


FIG.4

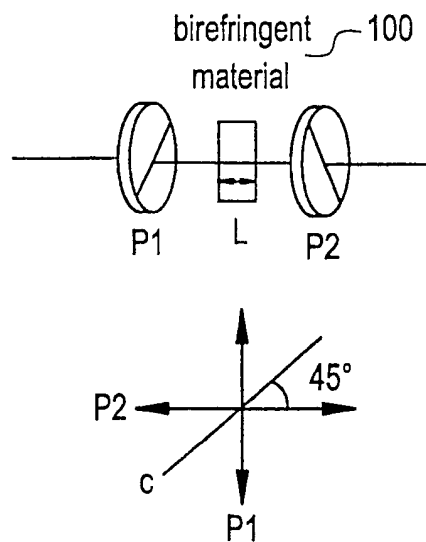

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G02B6/293

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 685 773 A (CARLSEN W JOHN ET AL) 11 August 1987 (1987-08-11) abstract; figure 1 claim 1 column 2, line 3 -column 2, line 60 column 3, line 50 -column 4, line 16 ----	1, 2, 17, 22, 25
A	WO 98 19415 A (MACRO VISION COMMUNICATIONS L) 7 May 1998 (1998-05-07) abstract; figure 2 page 12, line 13 -page 17, line 5 ----	1, 17, 22, 25
A	US 4 801 189 A (SHAW HERBERT J ET AL) 31 January 1989 (1989-01-31) abstract; figure 3 column 2, line 16 - line 36 -----	1, 3, 4, 17, 22, 25

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

A document member of the same patent family

Date of the actual completion of the international search

2 November 1999

Date of mailing of the international search report

09/11/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel: (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Jakober, F

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4685773 A	11-08-1987	US 4566761 A	28-01-1986
		EP 0220691 A	06-05-1987
		JP 62105116 A	15-05-1987
		CA 1255135 A	06-06-1989
		EP 0177800 A	16-04-1986
		EP 0362900 A	11-04-1990
		JP 61073919 A	16-04-1986
WO 9819415 A	07-05-1998	US 5867291 A	02-02-1999
		AU 4674397 A	22-05-1998
		EP 0937346 A	25-08-1999
		US 5694233 A	02-12-1997
		US 5912748 A	15-06-1999
US 4801189 A	31-01-1989	AT 110856 T	15-09-1994
		AU 3594184 A	06-06-1985
		BR 8406079 A	17-09-1985
		CA 1259510 A	19-09-1989
		DE 3486343 D	06-10-1994
		DE 3486343 T	27-04-1995
		EP 0143583 A	05-06-1985
		JP 60134206 A	17-07-1985